




THE WORLD'S LEADING MANUFACTURER OF LABEL DISPENSERS,
REWINDERS, UNWINDERS, SLITTERS & COUNTING SOLUTIONS

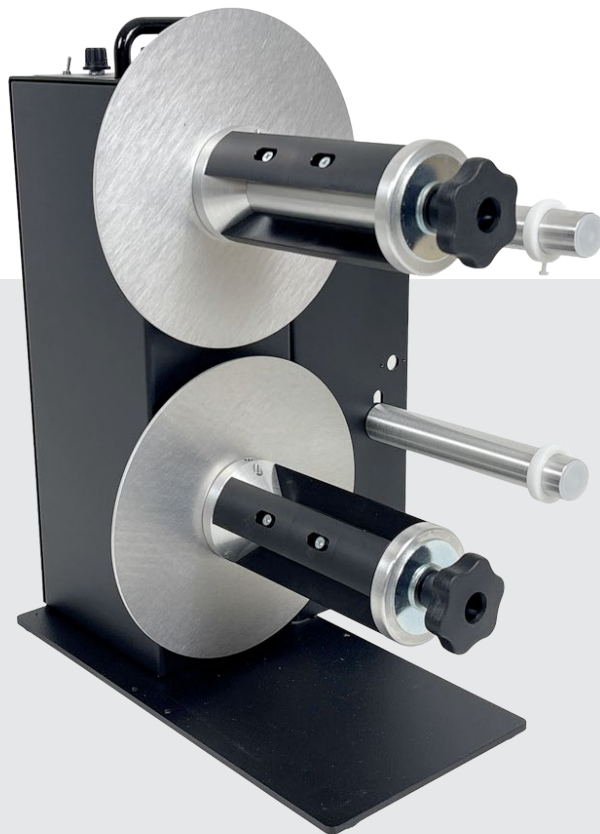


TWIN-CAT-2

labelmate.com

Dual Spindle Station

The Dual Spindle TWIN-CAT-2 is a fast and easy way to deliver label rolls the way you want them! With various label widths and core diameters along with Inspection and Counting options, this all-in-one rewind/unwind Station is the ideal solution for in-house label roll conditioning.

- ✓ Waste matrix removal from die-cut labels inline with your printer or off-line
- ✓ Inside wound to outside wound applications
- ✓ Reverse the order of serialized labels
- ✓ Rewind labels on a different core size
- ✓ Wind small rolls of labels from larger ones
- ✓ Rewind a specific quantity of labels with the optional inspection and pre-set counter options

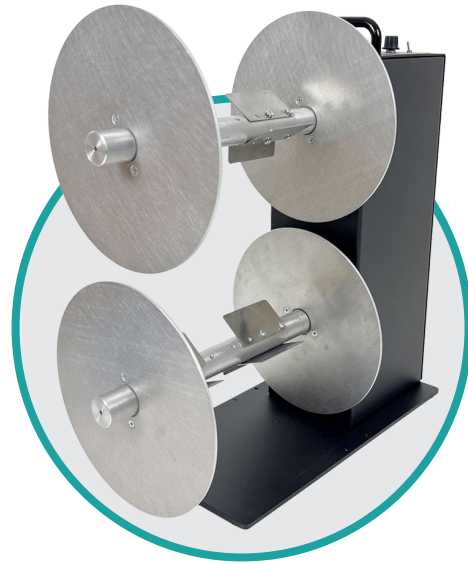

FEATURES

- 2 Powerful motors, Bi-Directional Unwinding & Rewinding
- 100+ possible configurations to handle any job
- Control Panel for setting direction & speed/torque for each spindle independently
- External Halt Control: Stop/start the unit with foot switch or other device
- Max. Speed: 125 CM/SEC at the beginning of a 76 mm core roll
- Max Label Roll weight: 2 x 5KG
- STANDARD/10-INCHES models come standard for using cores in 76mm. On request available in 38/40/44/50/70/100 mm. See pages 37 & 38 "Chucks and Vanes" for item configuration
- STANDARD/1-INCH & 10-INCHES models come standard with inner & outer flanges. We recommend to add optional APG-CAT to the ACH, 1-INCH and CHUCK models with other diameter than 76mm
- Roll Diameter: 2 x 220mm

DIMENSIONS

- W x D x H: 180 x 370 x 470 mm
- Shipping Weight: 20 KG, depending on configuration and options

GENERAL

- Power Supply Input: 230V-50Hz Output: 15VDC – 4.6A
- Limited Warranty of 2 Years, 1 Year on the Power Supply

TWIN-CAT-2-BASE-UNIT

P/N	MODEL	DESCRIPTION
LMR016	TWIN-CAT-2 BASE-UNIT	TWIN-CAT-2, Base-Unit without any core holder

SELECT 2 CORE HOLDERS

P/N	MODEL	DESCRIPTION	MAX LABEL WIDTH
LMX460	1-INCH	25,4 mm (1") standard shaft and flanges.	155 mm
LMX461	STANDARD	Standard shaft with vanes and flanges.	155 mm
LMX462	10-INCHES	Standard shaft with vanes and flanges.	255 mm
LMX463	ACH-TWIN	Adjustable core holder shaft for cores from 25 to 101 mm. * cannot be mixed with another type.	155 mm
LMX464	CHUCK – C-76170	Quick-Chuck shaft in 76 mm core diameter and 170 mm length and inner flange.	170 mm
LMX465	CHUCK – C-76220	Quick-Chuck shaft in 76 mm core diameter and 220 mm length and inner flange.	220 mm
LMX466	CHUCK – C-76270	Quick-Chuck shaft in 76 mm core diameter and 270 mm length and flanges.	270 mm
LMX600	CHUCK – C-38170	Quick-Chuck shaft in 38 mm core diameter and 170 mm length and inner flange.	170 mm
LMX601	CHUCK – C-40170	Quick-Chuck shaft in 40 mm core diameter and 170 mm length and inner flange.	170 mm
LMX557	CHUCK – C-44170	Quick-Chuck shaft in 44 mm core diameter and 170 mm length and inner flange.	170 mm




TWIN-CAT-2-OPTIONS

P/N	MODEL	DESCRIPTION
LMX470	INSP-1	Bracket with 2 rollers, mounted on the side of the TWIN-CAT. Select this option for Matrix Removal on OKI-type colour printer
LMX472	FOOT SWITCH	Foot Switch to start/stop the TWIN-CAT-2
LMX473	OUTER FLANGE	220 mm outer flange for Quick-Chuck in 76 mm



Your local partner:



+32 2 375 69 60

brussels@labelmate.com

Bergensesteenweg 78
1651 Lot (Belgium)

www.labelmate.com



OFERTĂ RAPIDĂ

Ai găsit echipamentul potrivit?

Trimite-ne cerințele tale și primești o recomandare configurată pentru aplicația, volumul și bugetul companiei.

OFERTA TA ÎN 3 PAȘI

01

Trimite-ne cerința

Produs, SKU, cantitate sau descrierea aplicației.

02

Verificăm configurația

Compatibilitate, accesorii, stoc și termen de livrare.

03

Primești rapid oferta

Configurație clară, preț și suport pentru decizie.



Scanează pentru cererea de ofertă

autoid.ro/contact

CERE OFERTĂ

08008 288 643

contact@autoid.ro

L-V 9:00 - 17:00