




THE WORLD'S LEADING MANUFACTURER OF LABEL DISPENSERS,
REWINDERS, UNWINDERS, SLITTERS & COUNTING SOLUTIONS

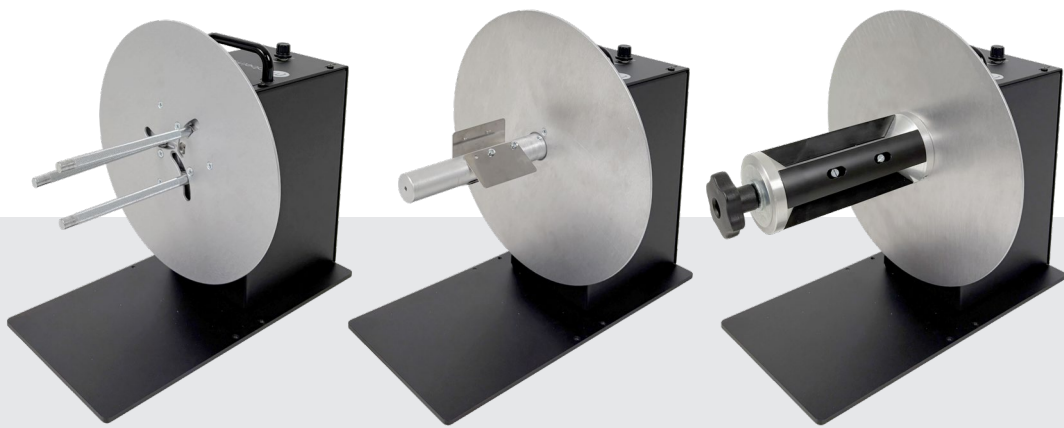


UNPOWERED UNWINDER UCAT-1

Unpowered Label Unwinders


HEAVY-DUTY UNWINDERS UCAT-1

Label unwinders provide a convenient way to **manage your supply roll of labels** as it feeds into a printer. You can use larger rolls of labels to minimize your unit label cost. The supply roll of labels does not have to be refreshed as often, **saving time and adding convenience**. External label rolls are always visible, making it easy to monitor the status of your label supply.

- ✓ Small footprint to fit on any desk
- ✓ Easy setup: attach the labels to the take-up core and ready to start
- ✓ Speed up to 125cm/sec to work with the fastest barcode printers available on the market
- ✓ Features adjustable speed/braking to align with printer
- ✓ Large capacity for roll diameters up to 300mm

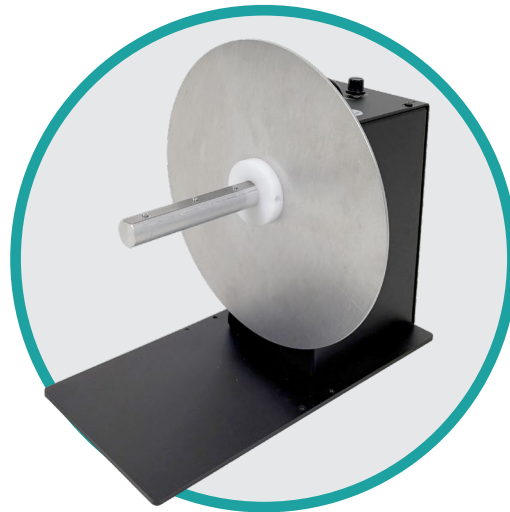

UCAT-1-1-INCH

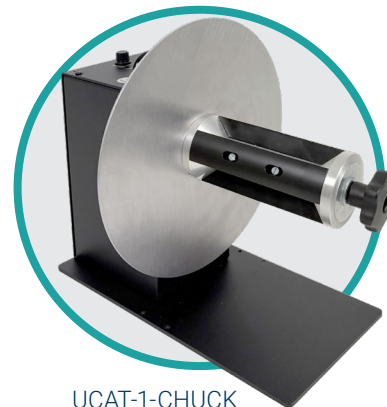

UCAT-1-CHUCK

FEATURES

- The UCAT-1-Standard has a vane-style core Holder
- The UCAT-1-ACH employs an adjustable core holder enabling the use of varying core sizes, for maximum flexibility
- The CAT-1-CHUCK includes a quick-locking "Quick-Chuck" core chuck permitting the fastest loading and unloading of cores and label rolls
- CHUCK/STANDARD/10-INCHES models come standard for using cores in 76mm. On request available in 38/40/44/50/70 mm.
- Weight: 9.6 KG to 11.1 KG depending configuration
- Max. Label Roll Weight: STD: 8kg - ACH: 7kg - QC: 8KG - 10-IN: 10kg
- Max. Label Roll Diam: 300mm, 280mm for ACH, 220mm for 1-INCH

UNPOWERED UNWINDERS UCAT-1

P/N	MODEL	DESCRIPTION	MAX LABEL WIDTH (mm)	MAX ROLL DIAM (mm)	MAX WEIGHT
LMU002	UCAT-1-STANDARD	Self-Powered-Adjustable Speed, Proportional Frictionless Braking. Standard for 76mm cores (38/40/44/50/70/100mm available)	155	300	8 KG
LMU003	UCAT-1-ACH	Self-Powered-Adjustable Speed, Proportional Frictionless Braking. Adjustable Core Holder for using any core diameter between 25 & 101 mm	155	280	7 KG
LMU004	UCAT-1-CHUCK	Self-Powered-Adjustable Speed, Proportional Frictionless Braking. Easy-Loading Quick-Chuck for 76mm cores (38/40/44/70/100mm available)	170 (optional 220 & 270)	300	10 KG
LMU005	UCAT-1-10-INCHES	Self-Powered-Adjustable Speed, Proportional Frictionless Braking. Standard for 76mm cores (38/40/44/50/70/100mm available)	255	300	10 KG
LMU006	UCAT-1-1-INCH	Self-Powered-Adjustable Speed, Proportional Frictionless Braking. For 25,4 mm (1") cores	155	220	8 KG

OPTIONS


P/N	MODEL	DESCRIPTION
LMX457	R-16	Option available on UCAT-1-STANDARD and UCAT-1-CHUCK to accept rolls up to 400mm in diameter. Factory installed.
LMX579		UNIVERSAL- ALIGNMENT PLATE for any desktop Thermal Transfer and Inkjet color printer
LMX491	STANDARD SHAFT	Standard shaft for UCAT-1 with vanes, internal and external flanges.
LMX546	1' SHAFT	1-Inch shaft for UCAT-1 with vanes, internal and external flanges.
LMX492	10" -SHAFT	10-Inches shaft for UCAT-1 with vanes, internal and external flanges.
LMX500	ACH-SHAFT	Adjustable Core Holder for any core size from 25 to 101mm in diameter. With inner flange.

GENERAL

- Limited Warranty of 2 Years, 1 Year on the Power Supply



Your local partner:



+32 2 375 69 60

brussels@labelmate.com

Bergensesteenweg 78
1651 Lot (Belgium)

www.labelmate.com



OFERTĂ RAPIDĂ

Ai găsit echipamentul potrivit?

Trimite-ne cerințele tale și primești o recomandare configurată pentru aplicația, volumul și bugetul companiei.

OFERTA TA ÎN 3 PAȘI

01

Trimite-ne cerința

Produs, SKU, cantitate sau descrierea aplicației.

02

Verificăm configurația

Compatibilitate, accesorii, stoc și termen de livrare.

03

Primești rapid oferta

Configurație clară, preț și suport pentru decizie.



Scanează pentru cererea de ofertă

autoid.ro/contact

CERE OFERTĂ

08008 288 643

contact@autoid.ro

L-V 9:00 - 17:00