



Copilot+PC



- AI-ready with the latest Intel® Core™ Ultra Processors (Series 2) and Intel® AI Boost technology
- 10.1" Lumibond display with Getac sunlight readable technology (1,000 nits) and capacitive touchscreen
- Enhanced enterprise security with 5MP Windows Hello face-authentication camera, multifactor authentication options, and optional Intel® vPro®
- Versatile I/Os connectivity including two Thunderbolt™ 4 and docking solutions
- Multiple battery configurations and options, including high-capacity battery and bridge battery for hot-swap support
- Wi-Fi 7 delivers superior data transfer speeds

Windows Hello face-authentication 5MP camera

13MP rear camera

Stylus pen

USB 3.2 Gen 2 Type-A


Thunderbolt™ 4 Type-C

DC in Jack

Kensington lock

Docking connector

Optional: RF antenna pass-through

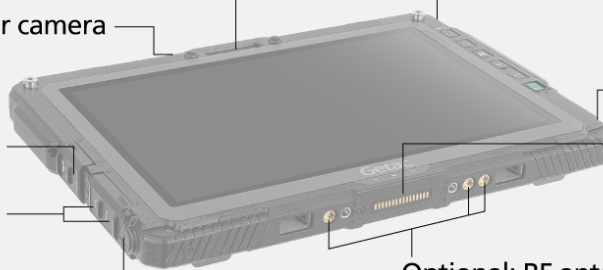

SPECIFICATIONS

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core Ultra 5 Processor 226V 16GB
Max. 4.5GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Platform options:

Intel® Core™ Ultra 5 processor 228V 32GB
Max. 4.5GHz with Intel® Turbo Boost Technology
8MB Intel® Smart Cache

Intel® Core™ Ultra 5 processor 236V 16GB, vPro® Enterprise
Max. 4.7GHz with Intel® Turbo Boost Technology
8MB Intel® Smart Cache

Intel® Core™ Ultra 5 processor 238V 32GB, vPro® Enterprise
Max. 4.7GHz with Intel® Turbo Boost Technology
8MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 256V 16GB
Max. 4.8GHz with Intel® Turbo Boost Technology
12MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 258V 32GB
Max. 4.8GHz with Intel® Turbo Boost Technology
12MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 266V 16GB, vPro® Enterprise
Max. 5.0GHz with Intel® Turbo Boost Technology
12MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 268V 32GB, vPro® Enterprise
Max. 5.0GHz with Intel® Turbo Boost Technology
12MB Intel® Smart Cache

VGA Controller

Intel® Arc™ 130V GPU (For Intel® Core™ Ultra 5 CPUs)
Intel® Arc™ 140V GPU (For Intel® Core™ Ultra 7 CPUs)

NPU

Intel® AI Boost (Up to 48 TOPS)

Display

10.1" Wide Viewing Angle TFT LCD WUXGA (1920 x 1200)
Protection film
1,000 nits LumiBond display with Getac
sunlight readable technology
Capacitive multi-touch screen

Storage & Memory

16GB LPDDR5X (Memory on Package)
Optional: 32GB LPDDR5X (Memory on Package)

256GB PCIe NVMe SSD
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard

Power button
5 tablet programmable buttons

Pointing Device

Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen
(multi-touch and digitizer)

Audio

Integrated speaker
Integrated dual-array microphone

Expansion Slot

Optional (top side): 1D/2D imager barcode reader,
or Serial port, or USB 2.0 Gen 1 Type-A port,
or LAN port (RJ45) , or microSD, or HF RFID reader ⁱ,
or HDMI 2.0 ⁱⁱ
Optional (right side): LAN port (RJ45) or Fingerprint reader ⁱⁱⁱ
Optional (back side): Smart card reader, or Bridge battery,
or Bridge battery + Smart card reader ^{iv}

I/O Interface

Tablet
Windows Hello face-authentication
5MP camera (front-facing) x 1
13MP auto focus rear camera x 1
DC in Jack x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 Type-C x 2
Docking connector x 1
Optional: SIM card slot x 1 (Micro-SIM, 3FF) ^v
Optional: RF antenna pass-through for GPS,
WWAN and WLAN

Optional keyboard dock:

USB 2.0 x 1
HDMI 2.0 x 1
LAN (RJ45) x 1
Serial port (9-pin; D-sub) x 1
DC in Jack x 1

Communication Interface

Optional: 10/100/1000 base-T Ethernet
Intel® Wi-Fi 7 BE201, 802.11be
Bluetooth (v5.4) ^{vi}
Optional: Dedicated GPS with L1/L5 ^{vii}
Optional: 4G LTE mobile broadband with integrated GPS ^{v, vii}
Optional: 5G Sub-6 with integrated L1 GPS ^{v, vii}
Dual SIM (Micro-SIM 3FF and e-SIM) ^{v, viii}

Security Feature

TPM 2.0
Kensington lock
Optional: Intel® vPro® Technology
Optional: Fingerprint reader ⁱⁱⁱ
Optional: HF RFID reader ^{i, ii}
Optional: Smart card reader ^{iv}
Windows Hello face-authentication
5MP camera (front-facing)
Optional: Absolute Persistence®

Power

AC adapter (65W, 100-240VAC, 50/60Hz)
Li-ion battery (11.61V, typical 4070mAh; min. 3800mAh) x 1
Optional: High capacity Li-ion battery (10.8V, 9240mAh) x 1
Optional: Bridge battery ^{iv}

Dimension (W x D x H) & Weight

Tablet:
279 x 194.5 x 23.5mm (10.98" x 7.65" x 0.92") ^{ix}
1.15 kg (2.53 lbs) ^{ix}

Tablet + Optional keyboard dock:
299 x 265 x 48.7mm (11.77" x 10.43" x 1.92") ^{ix}
2.25 kg (5 lbs) ^{ix}

Rugged Feature

MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified ^x
Vibration & 6ft (1.8m) drop resistant ^{xi}
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D) ^{xii}

Environmental Specification

Temperature ^{xiii}.
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager ^{xiv}
Getac Driving Safety Utility (trial version)
Getac KeyWedge Barcode Reader Utility (trial version)
Optional: Absolute Secure Endpoint
Optional: Absolute Secure Access

Optional software

Getac Driving Safety Utility
Getac KeyWedge Barcode Reader Utility
Getac Monitoring
Getac VGPS Utility ^{xv}

Accessories

Battery (11.61V, typical 4070mAh; min. 3800mAh)
AC adapter (65W, 100-240VAC, 50/60Hz)
Capacitive stylus with tether

Optional:

Carry bag
Folio case
Battery (11.61V, typical 4070mAh; min. 3800mAh)
High capacity Li-ion battery (10.8V, 9240mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Digitizer pen with tether
Capacitive stylus with tether
Protection film
Hard handle
Rotating hand strap with kickstand
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Detachable keyboard
Vehicle cradle ^{xvi}
Keyboard dock
Vehicle dock ^{xvi}
Office dock
65W USB-C AC Adapter
100W USB-C AC Adapter
Getac DS100 USB-C docking station with AC adapter

UX10 FULLY RUGGED TABLET

Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime. That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard
3 years Bumper-to-Bumper

- I. 13.56MHz contactless HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- II. 1D/2D imager barcode reader, Serial port, USB 2.0 Gen 1 Type-A port, LAN port (RJ45), HF RFID reader, MicroSD and HDMI 2.0 are mutually exclusive options.
- III. Fingerprint reader and LAN Port are mutually exclusive options.
- IV. Smart card reader, Bridge battery and Bridge battery + Smart card reader are mutually exclusive options.
- V. Units with 4G/5G option come with an embedded SIM card slot.
- VI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices. Users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that are operating in the area.
- VII. Supports GPS, GLONASS, Galileo, BeiDou and QZSS. Only available in US, UK, EU, Australia and New Zealand.
- VIII. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- IX. Weight and dimensions vary from configurations and optional accessories.
- X. MIL-STD-461 90W AC adapter sold separately.
- XI. Drop test results vary from configurations and optional accessories.
- XII. Available with limited configurations and environment conditions.
- XIII. Tested by an independent third-party test lab following MIL-STD-810H.
- XIV. Available when barcode reader option is selected.
- XV. Models require either embedded or standalone GPS module.
- XVI. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.



GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1,
Nangang Rd., Nangang Dist., Taipei City,
115018, Taiwan, R.O.C. Tel : +886 2 2785
7888 globalmarketing@getac.com |
www.getac.com
Copyright © 2025 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only,available specification shall be subjected to
quotation by request.



OFERTĂ RAPIDĂ

Ai găsit echipamentul potrivit?

Trimite-ne cerințele tale și primești o recomandare configurată pentru aplicația, volumul și bugetul companiei.

OFERTA TA ÎN 3 PAȘI

01

Trimite-ne cerința

Produs, SKU, cantitate sau descrierea aplicației.

02

Verificăm configurația

Compatibilitate, accesorii, stoc și termen de livrare.

03

Primești rapid oferta

Configurație clară, preț și suport pentru decizie.



Scanează pentru cererea de ofertă

autoid.ro/contact

CERE OFERTĂ

08008 288 643

contact@autoid.ro

L-V 9:00 - 17:00