

M20 SE


Android Mobile Terminal



Large 6.5" immersive display and advanced scanning for high-speed mobile workflows.

- Versatile mobile terminal powered by Android 13 for all mobile business needs.
- Supported by LANDi's asset management platform, **LANDi Connect**, to meet the evolving demands of today's digital world.
- Pocket-size design, enabling high-level productivity and connectivity on the go.

- Expansive 6.5" touch screen and ergonomic interface
- Powerful processor for smooth operation (Qualcomm Quad-core, 2.0GHz)
- Quick-swap battery on duty (3500mAh/7.7V)
- Advanced connectivity for high-mobility (2G/3G/4G, WiFi, GPS, Bluetooth 5.0)
- 5MP rear camera for convenient QR code reading, Optional front camera

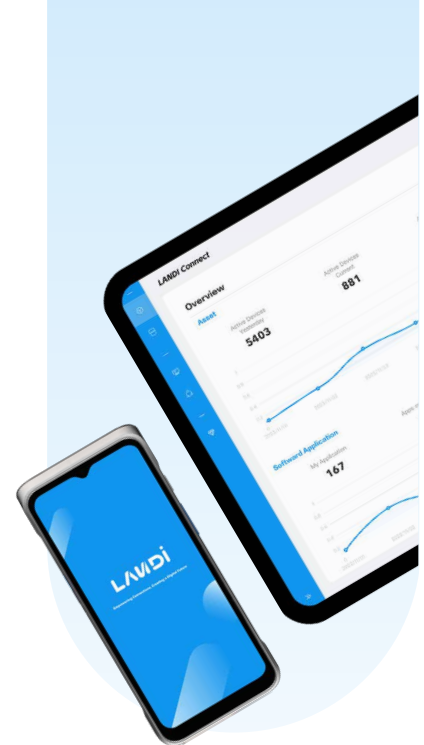

SPECIFICATIONS

Processor	Qualcomm Quad-core, 2.0GHz	Positioning	AGPS, GPS, Glonass, Beidou, Galileo
OS	Android 13 (GMS Certified)	Camera	Front: 2M pixels, fixed focus, for QR code scanning Rear: 5M pixels, autofocus and flashlight 8M pixels, autofocus and flashlight (Optional, Non-GMS)
Memory	3GB RAM+32GB FLASH 4GB RAM+64GB FLASH (Optional) 2GB RAM + 16GB FLASH (Optional, Non-GMS) Micro SD Card (Up to 2TB)	NFC	Android NFC, ISO/IEC 14443, ISO15693 compliant, support Type A/B, Mifare, FeliCa, EMVCo PCD L1 Certified
Display & Touchscreen	6.5", IPS, 720x1600 HD capacitive multi-touch	SIM/SAM Slots	2*SIM 2*SAM (Optional) 1*SIM+1eSIM (Optional)
Scanner	· Option 1: None · Option 2: LANDI Scan Engine · Option 3: Honeywell Scan Engine**	Connection	· 1 USB Type-C · 2 POGO pins
Keypad	1*power key (Right side) 2*scan code keys are located on each side (Optional) 2*volume keys (Left side)	PSU	5V/2A
Audio	Speaker: 1W 90dB@0.1m Headset: USB Type-C MIC: Dual MIC	Battery	7.7V/3500mAh, removable
Connectivity	Cellular: 4G fallback 3G and GPRS, Global band Wi-Fi: IEEE 802.11 a/b/g/n/ac 2.4GHz and 5GHz Bluetooth: Bluetooth 5.0, support BLE	Size	172mm x 79mm x 19mm
Protection	1.2m drop tested *Data from LANDI lab	Weight	295g (with battery)
Sensor	G-sensor Light Sensor Proximity Sensor	Accessories (Optional)	Single Charging Base (Device + Battery) Communication Base Quad Bay Battery Base Wrist Strap Rubber Boot Screen Protector
Certifications	CE, CB, FCC, IC, RoHS, WEEE, GMS**	Environment	Operating Temperature: -10°C to +50°C Storage Temperature: -20°C to +55°C Operating Humidity: 10% to 90% non-condensing

* When MicroSD card is inserted. Card slot is 1 SIM + 1 MicroSD + 2 SAM.

** Option not available on 2GB + 16GB memory.





OFERTĂ RAPIDĂ

Ai găsit echipamentul potrivit?

Trimite-ne cerințele tale și primești o recomandare configurată pentru aplicația, volumul și bugetul companiei.

OFERTA TA ÎN 3 PAȘI

01

Trimite-ne cerința

Produs, SKU, cantitate sau descrierea aplicației.

02

Verificăm configurația

Compatibilitate, accesorii, stoc și termen de livrare.

03

Primești rapid oferta

Configurație clară, preț și suport pentru decizie.



Scanează pentru cererea de ofertă

autoid.ro/contact

CERE OFERTĂ

08008 288 643

contact@autoid.ro

L-V 9:00 - 17:00